



东莞市华宇杰明玻璃钢容器有限公司  
DONGGUAN CITY HUAYU JIEMING FRP VESSEL CO., LTD.

## PE 内胆玻璃钢罐 PE LINER FRP TANK

直径07"-72"(180-1800mm); 应用于介质过滤器和软水器  
From 07" through 72" dia. For multi-media filter and softener



- PE(Polyethylene) 塑料无缝整体内胆;
- 4"注塑罗纹开口配合直径07"~36" 罐体;
- 6" 铝合金法兰开口配合  
直径36"~72", 罐体;

- 玻璃纤维加高性能环氧树脂连续缠绕;
- 优越彻底的防腐性能
- FRP 增强玻璃钢三脚底座

- PE (Polyethylene) seamless one-piece tank liner;
- 4"precision injected model with threaded opening for 07"~36" dia. tanks
- 6" Aluminum alloy flange opening for 36"~72", dia. tanks;
- Continuous strands of fiber-glass with high strength Epoxy resin;
- Completely rust and corrosion free;
- FRP reinforced tripod base


厂址: 广东省东莞市沙田镇稔洲海堤边华宇杰明厂  
电话: 0769-81516645  
传真: 0769-81516647  
QQ: 1493039790  
微信: 13138808489



东莞市华宇杰明玻璃钢容器有限公司  
DONGGUAN CITY HUAYU JIEMING FRP VESSEL CO., LTD.

### PE内衬罐体规格表/PE Liner Vessel Specification

| 罐体尺寸/Vessel size |       |             | 容积<br>Capacity | 罐开口 Opening |         | LA   | LB   | X    | D    | WT   |
|------------------|-------|-------------|----------------|-------------|---------|------|------|------|------|------|
| 序号               | inch  | mm          | L              | 上/top       | 下/bot   | mm   | mm   | mm   | mm   | kg   |
| 1                | 7x13  | φ 180x335   | 6.3            | 2.5" NPSM   | \       | 343  | 330  | 165  | 181  | 1.4  |
| 2                | 7x17  | φ 180x430   | 8.6            | 2.5" NPSM   | \       | 428  | 414  | 292  | 181  | 1.6  |
| 3                | 7x35  | φ 180x905   | 20.1           | 2.5" NPSM   | \       | 904  | 890  | 768  | 181  | 2.8  |
| 4                | 8x17  | φ 205x445   | 11.3           | 2.5" NPSM   | \       | 446  | 432  | 292  | 206  | 1.9  |
| 5                | 8x35  | φ 205x905   | 24.0           | 2.5" NPSM   | \       | 905  | 891  | 751  | 206  | 3.2  |
| 6                | 8x44  | φ 205x1130  | 32.5           | 2.5" NPSM   | \       | 1131 | 1117 | 977  | 206  | 3.9  |
| 7                | 9x35  | φ 230x905   | 32.0           | 2.5" NPSM   | \       | 905  | 891  | 734  | 232  | 3.9  |
| 8                | 9x42  | φ 230x1085  | 39.0           | 2.5" NPSM   | \       | 1085 | 1071 | 914  | 232  | 4.5  |
| 9                | 9x48  | φ 230x1230  | 44.7           | 2.5" NPSM   | \       | 1232 | 1218 | 1061 | 232  | 4.8  |
| 10               | 10x17 | φ 255x445   | 17.8           | 2.5" NPSM   | \       | 447  | 433  | 259  | 257  | 2.5  |
| 11               | 10x35 | φ 255x905   | 38.6           | 2.5" NPSM   | \       | 903  | 889  | 715  | 257  | 4.5  |
| 12               | 10x44 | φ 255x1130  | 49.5           | 2.5" NPSM   | \       | 1130 | 1116 | 942  | 257  | 5.6  |
| 13               | 10x54 | φ 255x1390  | 61.9           | 2.5" NPSM   | \       | 1390 | 1376 | 1202 | 257  | 6.5  |
| 14               | 12x52 | φ 300x1340  | 84.8           | 2.5" NPSM   | \       | 1342 | 1332 | 1115 | 305  | 8.5  |
| 15               | 12x65 | φ 300x1650  | 106.3          | 2.5" NPSM   | \       | 1650 | 1640 | 1425 | 305  | 11.8 |
| 16               | 13x54 | φ 330x1400  | 103.6          | 2.5" NPSM   | \       | 1400 | 1390 | 1155 | 334  | 9.5  |
| 17               | 14x65 | φ 355x1670  | 145.6          | 2.5" NPSM   | \       | 1671 | 1661 | 1410 | 360  | 13.3 |
| 18               | 14x65 | φ 355x1670  | 145.6          | 4" -8UN     | \       | 1670 | 1661 | 1410 | 360  | 13.9 |
| 19               | 16x65 | φ 400x1670  | 187.7          | 2.5" NPSM   | \       | 1672 | 1662 | 1380 | 410  | 17.3 |
| 20               | 16x65 | φ 400x1830  | 187.7          | 4" -8UN     | 4" -8UN | 1830 | 1662 | 1380 | 410  | 17.9 |
| 21               | 18x65 | φ 450x1825  | 237.0          | 4" -8UN     | 4" -8UN | 1825 | 1640 | 1310 | 465  | 27.1 |
| 22               | 21x69 | φ 530x1780  | 305            | 4" -8UN     | \       | 1780 | 1563 | 1300 | 540  | 42   |
| 23               | 21x69 | φ 530x1780  | 305            | 4" -8UN     | 4" -8UN | 1780 | 1563 | 1300 | 540  | 41   |
| 24               | 24x72 | φ 600x1920  | 415            | 4" -8UN     | \       | 1920 | 1677 | 1400 | 612  | 58   |
| 25               | 24x72 | φ 600x1920  | 415            | 4" -8UN     | 4" -8UN | 1920 | 1677 | 1400 | 612  | 58   |
| 26               | 24x87 | φ 600x2370  | 510            | 4" -8UN     | 4" -8UN | 2370 | 2027 | 1750 | 612  | 68   |
| 27               | 30x72 | φ 750x1920  | 640            | 4" -8UN     | \       | 1920 | 1661 | 1300 | 765  | 84   |
| 28               | 30x72 | φ 750x1920  | 640            | 4" -8UN     | 4" -8UN | 1920 | 1661 | 1300 | 765  | 85   |
| 29               | 30x87 | φ 750x2400  | 782            | 4" -8UN     | 4" -8UN | 2400 | 2011 | 1650 | 765  | 110  |
| 30               | 36x72 | φ 900x1950  | 850            | 4" -8UN     | 4" -8UN | 1950 | 1598 | 1200 | 918  | 134  |
| 31               | 36x94 | φ 900x2465  | 1205           | (法兰/F)      | (法兰/F)  | 2465 | 2444 | 1600 | 918  | 131  |
| 32               | 40x72 | φ 1000x1915 | 1046           | 4" -8UN     | 4" -8UN | 1910 | 1605 | 1130 | 1020 | 131  |
| 33               | 40x94 | φ 1000x2415 | 1332           | (法兰/F)      | (法兰/F)  | 2415 | 2150 | 1570 | 1020 | 158  |
| 34               | 48x72 | φ 1200x1880 | 1308           | (法兰/F)      | (法兰/F)  | 1880 | 1578 | 850  | 1218 | 197  |
| 35               | 48x94 | φ 1200x2430 | 1909           | (法兰/F)      | (法兰/F)  | 2430 | 2128 | 1400 | 1218 | 241  |
| 36               | 60x83 | φ 1500x2120 | 2158           | (法兰/F)      | (法兰/F)  | 2120 | 1780 | 950  | 1530 | 340  |
| 37               | 60x94 | φ 1500x2430 | 2688           | (法兰/F)      | (法兰/F)  | 2430 | 2080 | 1200 | 1530 | 392  |

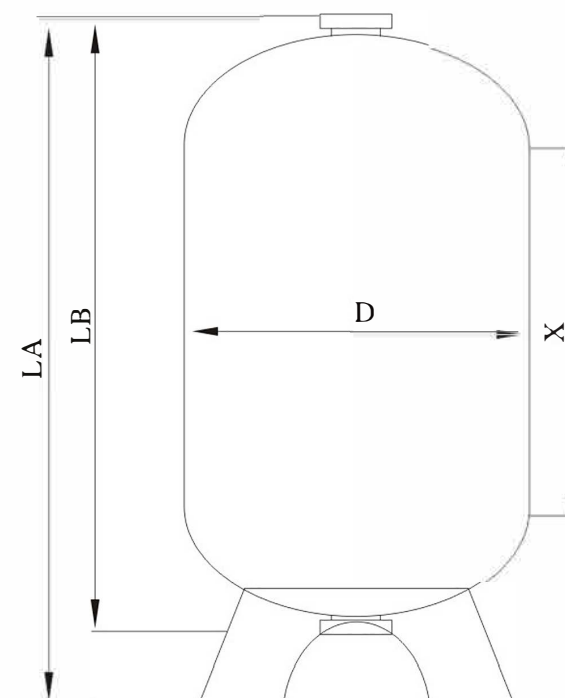

- 罐体材质:  
PE 塑料内胆  
外层玻璃纤维与环氧树脂连续缠绕增强;
- 最大工作压力: 1.0MPa(150PSI)
- 工作温度: 1-49℃
- 最大真空度: 127mmHg
- Materials of construction  
Polyethylene (PE) inner shell  
Continuous Fiberglass with Epoxy resin  
roving at outer shell
- Max. working pressure: 1.0MPa(150PSI)
- Working temperature: 1-49℃
- Max. Vacuum: 127mmHg(5"mmHg)